
## Wenger

## **Legacy® Select Acoustical Shell**

Your Performance Partner

- 5' (152 cm) wide panels.
- Panels are constructed of ¾" (19 mm) honeycomb core with ¾16" (4.76 mm) thick laminated hardboard skin on front and back.
  Overall panel thickness is 1½8" (28.6 mm).
- Panels are curved at a 10' (305 cm) radius to provide proper diffusion of sound.
- Top Panel folds for storage using gas assists and a tool to raise and lower the shell.
  Top Panel folds at 61" (155 cm) from top of tower.
- · Base and Shell Frame are constructed of black power-coat painted steel.
- · Base includes a rear counterweighted design.
- Shell tower available in heights from 11' (335 cm) to 16' (489 cm) maximum.
- Shell tower rolls through 34" wide x 80 high" (86 x 203 cm) door opening in the folded Storage Position.
- Includes four swivel, non-marring rubber casters for easy movement. 4" dia (102 mm) casters at the front
  - and 3" dia (91 mm) casters at the back.
- Bottom Filler Panel is removable and rests 2" (51 mm) from floor.
  Bottom Filler Panel is stored in back of shell.
- · Front Panel finishes are available in solid colors and selected woodgrain laminates.
- · Back Panel finish is black laminate.
- Overall shell surface coverage is 60 ft<sup>2</sup>. (5.6 m<sup>2</sup>) at 12' (3.7m) height.
- Shells nest compactly at 21" (53 cm) per unit.
- · Shipped assembled.
- 5-year warranty.
- · Set up videos are available at www.wengercorp.com.
- Environmental attributes and LEED compliance for this product can be found at www.wengercorp.com/GREEN or by contacting your Wenger representative.



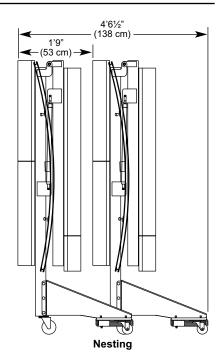





Storage Position Easy Setup

Performance Position

555 Park Drive, PO Box 448 Owatonna, MN 55060-0448 Phone 800.4WENGER (493.6437) Fax 507.455.4258 Customer Service 800.887.7145 WEB SITE wengercorp.com